

# CLT punchmarking

CLT – CROSS LAMINATED TIMBER

02/2014

## Description

- Product characteristics:

Diameter: 6 mm  
Penetration:  $\approx 5$  mm  
Accuracy:  $\pm 3$  mm


- Field of application:

Marking of indents to indicate positions for screws, drill holes, etc.

- Feasibility:

Indents can only be marked on one side. Therefore, when engineering the CLT panels, it is essential to avoid two-sided CNC machining or turning the panels, as this could conceal the indent markings.

## Illustration

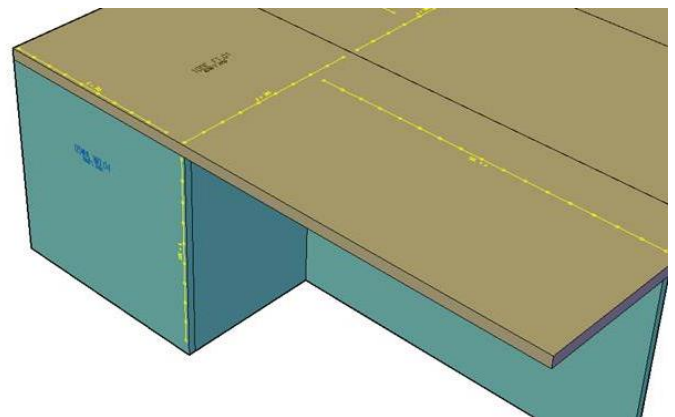

Indent preformed during production